CEILING MOUNTED SHELVES STANDARD SERIES



Model No: _____ Quantity:

FEATURES:

Shelf is furnished with modern square. Secured to concrete slab by means of stainless steel square tube uprights screwed to adaptor.

CONSTRUCTION:

Fully welded front edges ground and polished for a monolithic appearance.

MATERIALS:

SCS

PARTS	s-line (standard)			
SHELVES	S/S 304 1.2MM THICKNESS			
UPRIGHTS	SS AISI 304 1.5MM 41Ø RD. TUBE			
UPRIGHTS HOLDER	S/S 304 1.2MM THICKNESS			
SCREW	10MM ANCHOR BOLT			
EQUIPMENT BUILT				
SURFACE	HAIRLINE FINISH (304)			
ASSEMBLY/SHIPPING	ASSEMBLED			

NO. OF TIERS: 1 = SINGLE TIER 2 = TWO TIER HEIGHT (FOR UPRIGHT ONLY)

WIDTH

LENGTH

DIMENSIONS:


	DIMENSIONS.							
	LENGTH	350(SERIES)	400 (SERIES)	DELIVERY - WT (350-400) / (1T-2T)				
S	1000	SCS1035XXX	SCS1040XXX	3.4 KG	3.7 KG			
	1100	SCS1135XXX	SCS1140XXX	3.6 KG	3.8 KG			
	1200	SCS1235XXX	SCS1240XXX	3.7 KG	3.9 KG			
, 	1300	SCS1335XXX	SCS1340XXX	3.8 KG	4 KG			
_	1400	SCS1435XXX	SCS1440XXX	3.9 KG	4.1 KG			
	1500	SCS1535XXX	SCS1540XXX	4 KG	4.2 KG			
	*1600	SCS1635XXX	SCS1640XXX	5.2 KG	5.4 KG			
	*1700	SCS1735XXX	SCS1740XXX	5.3 KG	5.5 KG			
_	*1800	SCS1835XXX	SCS1840XXX	5.4 KG	5.6 KG			
	*1900	SCS1935XXX	SCS1940XXX	5.5 KG	5.7 KG			
	*2000	SCS2035XXX	SCS2040XXX	5.6 KG	5.8 KG			
]	*2100	SCS2135XXX	SCS2140XXX	5.7 KG	5.9 KG			
				•				

A ----

***UNITS EQUIPPED WITH 3 UPRIGHTS**

LOAD CAPACITY 25KG PER 1 SQ. METER (NORMALY DISTRIBUTED)

DIMENSIONS AND SPECIFICATIONS:

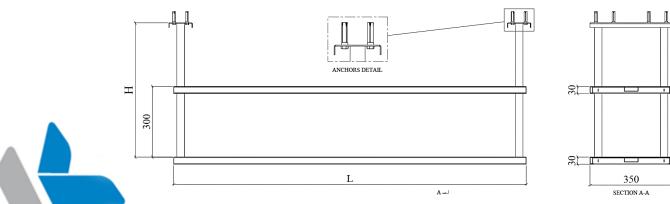

www.raqtan.com

Raqtan encourage you to customize products to your specifications. Special customize configuration available upon request – kindly note this will include additional charges.