

Item: \_\_\_\_\_  
Model No: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_

### FEATURES:

Our sink are built of heavy gauge 16(1.5mm) stainless steel, fully welded joints with radius on all corners and polished as one-piece material.

Legs are equipped with gussets and adjustable bullet feet for easy leveling. Placement of direct leg supports ensures stability of the column load requirement for the entire sink unit.

### CONSTRUCTION:

Top and sink bowls are **Tig - welded**, polished joints for a monolithic appearance. Horizontal cross bracing is designed adjustable, fitted to legs with stainless steel couplings and set screws.

This allows for more flexibility to accommodate different models of grease traps underneath and other products in particular areas. To ensure proper rigidity, Raqtan's sinks are never pressed, they are fully welded to exact specifications and standards.



### MATERIAL:

PARTS	S-LINE (STANDARD)
TOP	S/S AISI 304 1.5 mm (16 Gauge)Thickness
UNDER SHELVES	S/S AISI 304 1.2 mm (18 Gauge)Thickness
CROSS BRACE	25mmØ S/S TUBE
STIFFENERS	S/S AISI 304 1.5 mm (16 Gauge)Thickness
BULLET FEET	ADJUSTABLE
LEGS(ROUND)	38mmØ S/S TUBES-S/S GUSSET
EQUIPMENT BUILT	
FINISH	WELDED
SURFACE	HAIRLINE FINISH (#4)
ASSEMBLY/SHIPPING	KCD (Knockdown)

### DIMENSIONS:

SINGLE COMPARTMENT	LENGTH	760(SERIES)	WEIGHT
	*625	SRR16257690(BS50)	27.89 kg
	900	SRR1907690(BS50)X	32.85 kg
	1200	SRR1127690(BS50)X	38.30 kg
TWO COMPARTMENTS	LENGTH	760(SERIES)	WEIGHT
	1200	SRR2-127690(BS50)	47.97 kg
	*1500	SRR2157690(BS50)X	50.78 kg
	1800	SRR2187690(BS50)X	54.59 kg
THREE COMPARTMENT	LENGTH	760(SERIES)	WEIGHT
	*1800	SRR3-187690(BS50)	71.53 kg
	2100	SRR3217690(BS50)X	75.42 kg
	2400	SRR3247690(BS50)X	79.30 kg

### SINK BOWL SIZE:

600 x 500 x 300

Sink with overflow drain  
Faucet holes on 8" centers.

\*NO DRAIN BOARDS

SRR \_ \_ 76 90 (BS50) \_

**Number of sink:**  
1 = Single compartment sink  
2 = Two compartment sink  
3 = Three compartment sink

Length







Width

900 Standard Height


**Drain board Location:**  
L = Left drain board  
R = Right drain board  
M = Middle sinks  
C = Sink cover  
P = Perforated sink  
S=Under Shelf

**Backsplash Type:**  
BS50 = 50 Thickness backsplash 45°

**TYPICAL DRAIN BOARD LOCATIONS/SECTIONS:**

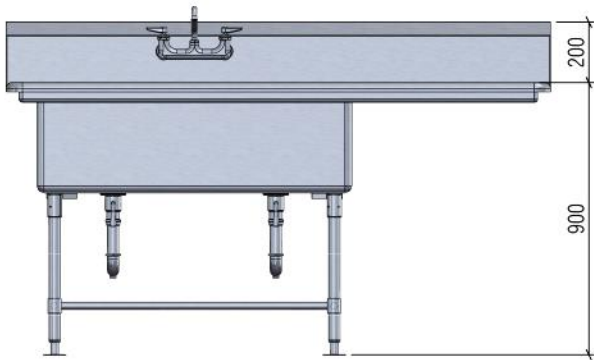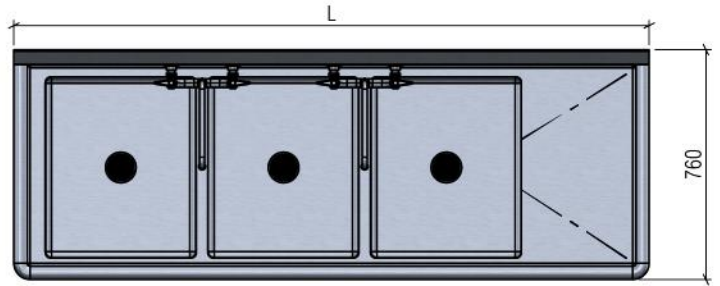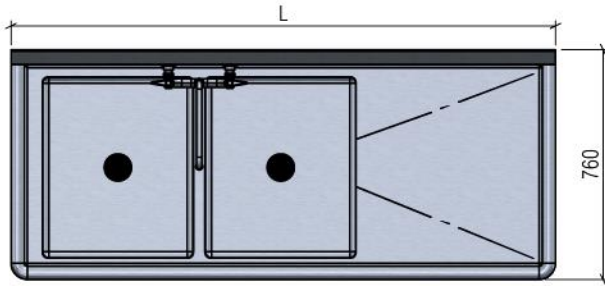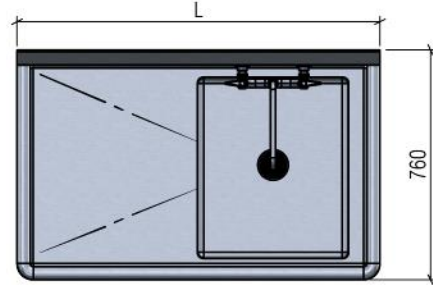

Pre-rinse faucet

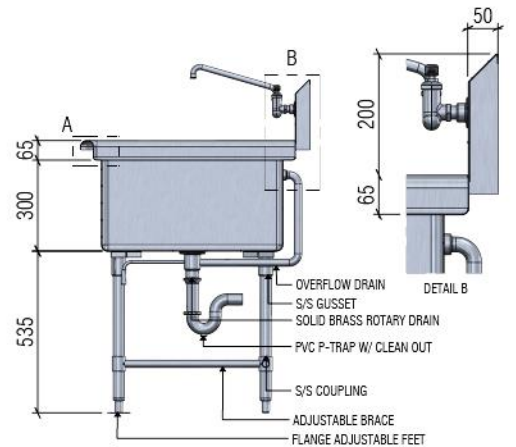


**ACCESSORIES AND OPTIONS(✦):**


DESCRIPTION	MODEL NO.
DRAIN	ENCORE – E32-4900
ROTARY WASTE	GXR-35T
PRE-RINSE FAUCET	KL66-1000 BR
WALL FAUCET	KSS54-8012SE1



✦ Optional Solid Brass Rotary Drain (GXR-35T)




Sinks Are Welded On Top Plate With Gap Of 38mm



✦ Optional S/S Perforated Sink



Hot & Cold Hose Fitting



✦ Optional Sink Covers With Holders



Adjustable Bullet Feet



✦ Flanged Adjustable Bullet Feet With Mounting Holes (A10-0854-C)

