

STAINLESS STEEL



Model No:	
Quantity: _	

FEATURES:

Top is furnished with modern square with front radii. The under top is reinforced with heavy duty stainless steel base frame and stiffeners. The top has a cut-out to accommodate imported drop-in cold pans. Legs are equipped with adjustable bullet feet for

easy leveling. As an option, cabinets can be with sneeze guard or tray slide, open, or have swing or sliding doors, also it can be equipped with casters.

CONSTRUCTION:

Square nose with front radii finish. Side cover to have seem less top with adjacent service line equipment's, ground and polished for a monolithic appearance. Threaded drain pipe assembly.

MATERIALS:

PARTS	S-LINE (STANDARD)				
TOP & STIFFENERS	S/S 304 1.5MM THICKNESS				
BULLET FEET	ADJUSTABLE				
LEGS(ROUND)	38MMØ S/S TUBES-S/S GUSSET				
GLASS	6MM TEMPERED				
LAMP	FLUORESCENT LAMP 24" WARM WHITE				
EQUIPMENT BUILT					
SURFACE	HAIRLINE FINISH (304)				
ASSEMBLY/SHIPPING	ASSEMBLE				

DIMENSIONS:

2 PANS	LENGTH	820		
	900	SLXX908290XXXXX		
3 PANS	LENGTH	820		
	1300	SLXX138290XXXXX		
4 PANS	LENGTH	820		
	1600	SLXX168290XXXXX		
5 PANS	LENGTH	820		
	2000	SLXX208290XXXXX		

ACCESSORIES AND OPTIONS(♦):





RECESSED PULL LIFT-OFF HIGNES **HANDLE**





MAGNETIC DOOR SWIVEL CASTERS **CATCHES**







GLASS HOLDER

COLD WELLS MODELS & ELECTRICAL RATINGS:

PANS	MANUFACTURER	MODEL	VOLTS	KILO WATTS	AMPS	HP
TWO PANS	WELLS (NSF) (ÚL)	RCP-200	220/240	0.633	2.9/2.6	1/4
TRHEE PANS		RCP-300	220/240	0.633	2.9/2.6	1/4
FOUR PANS		RCP-400	220/240	0.748	3.4/3.1	1/3
FIVE PANS		RCP-500	220/240	0.736	3.3/3.1	1/2











OPTIONAL SNEEZE GUARD AND TRAY SLIDES


FEATURES:

Service line series has the option of 6mm thickness tempered glass sneeze guard. Fixed by means of 32mm stainless steel tubular uprights with end caps, glass holders and decorative nuts. Also the series has the option to have a foldable tubular tray slide to accommodate food trays.



TYPICAL CROSS SECTION

www.ragtan.com

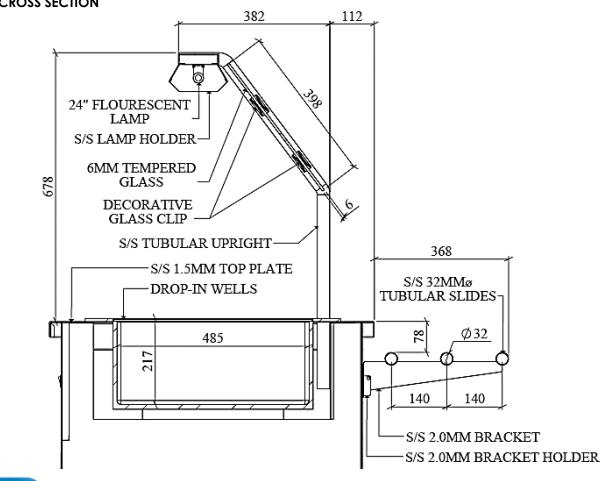



DIMENSION AND SPECIFICATIONS

