

SOUDA-SGNG

REFRIGERATED SQUARE GRAB AND GO UNIT



SOUDA-SGNG-900-BLK

SOUDA-SGNG-900-SS

SOUDA-SGNG-900-WHT

STANDARD FEATURES

DESIGN

· Cabinet design is well-engineered to meet functionality, and to fulfill operational aspects and user expectations.

· Efficient refrigeration system to provide user colder products temperature with lower operational cost.

REFRIGERATION SYSTEM

- Corrosion-proof hot gas condensate evaporation.
- · More organized and less exposed wires.
- · Bolted back cover for easy maintenance access.
- · Large evaporator fan blades to give lower velocity and high-volume airflow.

CABINET CONSTRUCTION

• Three (3) exterior finish choices - Stainless steel, black, and white coated galvanized iron.

- · Side and top double glass for great product visibility.
- · Glass with panorama borders for better design integration.
- · Entire Cabinet structure is foamed-in-place using a high density polyurethane insulation.
- · Heavy duty and welded structure prior coating for corrosion protection.

SHELVING

- Three (3) adjustable shelves with plenty of space.
- · Shelf support brackets made of same material as cabinet interior; shelves areadjustable on 30mm (13/16") increments.
- Shelf front stopper trim.

COLORS

Available in: black, stainless steel, and white.

*If you want to get different colors, please contact our sales representative.ف

LIGHTING

• Integrated magnetic LED lights - 4 hidden lights.

MODEL FEATURES

- Three (3) colors / finishes: black, stainless steel, and white.
- · Effortless usage for both customers and staff.
- Adjustable bullet feet with range of 50mm.
- Adjustable shelves on 30mm (13/16") increments.
- Interior and refrigeration system are isolated with insulated base.
- · Stable temperature levels to realize products' needs.

SPECIAL FEATURES

- · LED lights are used which is long lasing and energy-efficient.
- Optimized honeycomb is used to get better air circulation through the cabinet.
- · A double-glazed glass system to reduce heat transfer from outer atmosphere to products inside the cabinet.

ELECTRICAL

• Unit is completely pre-wired at factory and ready to connect to a 240/50-60/1 phase, 13 amp dedicated outlet.




DATA*

Cabinet Model	Internal Volume		rnal Ca ensions		Internal Cabinet Dimensions (mm)			Shelves and base width	^{oase} de	Shelves pth (mm)		Base depth	Weight (kg)
	(m)	L	D	H**	L _i	Di	Hi	(mm)	Тор	Mid	Low	(mm)	
600	0.25	605			563	563		533					~146
900	0.38	900	755	1330	840	680	800	815	287	337	387	457	~164
1500	0.63	1500		1460		1430					~245		

Cabinet Model	Horse Power (HP)	Amps	Refrigerant Charge (g)	Refrigerant Type	Temperature Range ([°] C)	Voltage/Hertz/Phase	Plug type
600	1/2	3.5	~300				
900	3/4	5	500	R404A	+2 to +6	230V/50 - 60Hz/1 Ph	
1500	3/4	7	~600				Type G

*BRODAN reserves the right to make changes at any moment and without prior notice. **Height can be adjusted -10 / +40mm



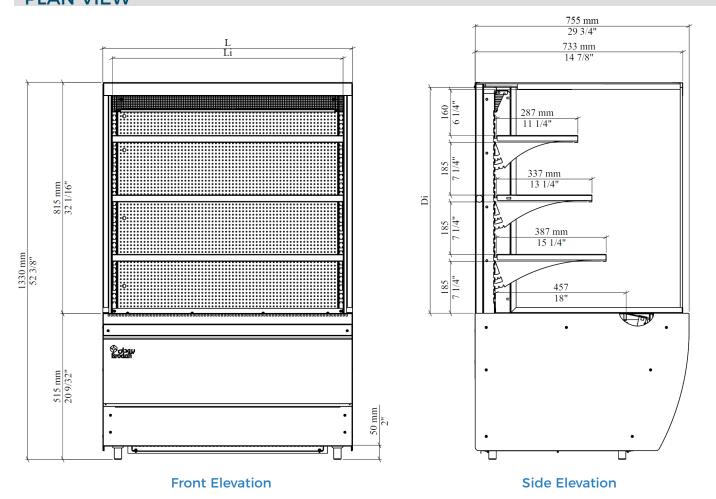

ORDERING

Cabinet	Color Version								
Model	Black	Stainless Steel	White						
600	SOUDA-SGNG-600-BLK	SOUDA-SGNG-600-SS	SOUDA-SGNG-600-WHT						
900	SOUDA-SGNG-900-BLK	SOUDA-SGNG-900-SS	SOUDA-SGNG-900-WHT						
1500	SOUDA-SGNG-1500-BLK	SOUDA-SGNG-1500-SS	SOUDA-SGNG-1500-WHT						